

2016 PRODUCT CATALOGUE
Royal Black · Royal Enjoy

BRIEF INTRODUCTION

Based on SHANDONG HAOHUA TIRE CO.,LTD manufacture,who located in ShouGuang Shandong,QINGDAO BLACK TIRE CO.,LTD is built by the same boss which is as the sales department to develop the series 2 of PCR&series 3 of TBR with new brand" ROYAL BLACK" tire worldwide upon 100% exclusivity.We mainly specialize in designing and supplying all kinds of Radial tires,including passenger Car tires,SUV tires,Light Truck tires,Truck and Bus tires etc.

Enjoying high popularity in both domestic and international markets,ROYAL BLACK brand tire is made as a high quality level brand from China,ROYAL BLACK brand owns big anges of PCR,LTR,A/T,H/T,4*4,M/T,VAN and TBR tires:more than 300sizes with 10 patterns made for PCR,no less than 23 patterns for TBR.All the patterns are designed according to the newest markets requirements by our big and smart research and development team.All tires are produced under the first class equipments and strict quality management system to ensure the stable quality.

With high quality,reasonable price and excellent service,we are able to be one of your best tire suppliers and long-term business patners. Thanks very much for your attention and time.



Royal Black · Royal Enjoy



Our Manufacture:SHANDONG HAOHUA TIRE CO.,LTD

Location:Houzhen Industry zone Shouguang ShanDong China

Area:800,000 M Including 3 workshops,4 warehouses and 3 office buildings

Total Capacity:20Million PCR&2Million TBR per year

Investments:200Million USD

Staffs:Around 4000 persons

Equipments:First class equipments are from Germany,Holland,Japan and China

Approved Quality standards:ISO/DOT/ECE/GCC/INMETRO/SONCAP

Main Values:GREEN,SAFETY AND ECONOMY



Royal Black · Royal Enjoy



**PASSENGER
LIGHT TRUCK
RADIAL TIRES**

TABLE OF CONTENTS

1-2 ROYAL PASSENGER

3-4 ROYAL PERFORMANCE

5-6 ROYAL SPORT

7-8 ROYAL COMMERCIAL

9-10 ROYAL VAN

11-12 ROYAL PRIME

13-14 ROYAL COMFORT

15-16 ROYAL A/T

17-18 ROYAL M/T


19-20 ROYAL SNOW

21-22 ROYAL WINTER

FEATURES:

Safety Performance on Wet Grounds Four wide longitudinal straight grooves efficiently drain off water, improving anti-sideslip performance on wet grounds.

Small shoulder circumferential longitudinal grooves at both sides and plump little pattern blocks on shoulders bring ideal rigidity and excellent handling. Meanwhile, small circumferential longitudinal grooves enable tire shoulders to diffuse heat quickly, providing higher safety performance.

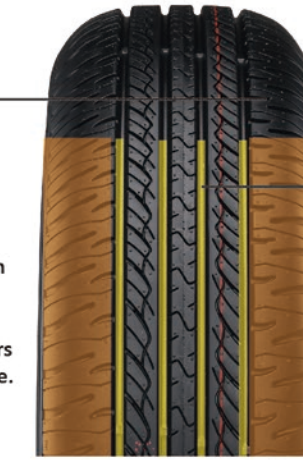

Comfort and Quietness Small cross-slots at both sides of continuous circumferential ribs in the middle simulate the muffler design principle and have strong noise absorption capacity. Thus, noise is effectively reduced, and riding comfort is improved.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
55	15	175/55R15	77	H	5.0	573	182	BSW	E	C	68	4
	15	185/55R15	82	V	6.0	585	194	BSW	E	C	68	4
	16	205/55R15	91	V	6.5	632	214	BSW	E	C	69	4
	13	175/60R13	77	H	5.0	540	177	BSW	E	C	68	4
	14	165/60R14	75	H	5.0	554	170	BSW	E	C	68	4
	14	185/60R14	82	H	5.5	578	189	BSW	E	C	68	4
60	14	195/60R14	86	H	6.0	590	201	BSW	E	C	69	4
	14	205/60R14	88	H	6.0	602	209	BSW	E	C	69	4
	15	175/60R15	81	H	5.0	591	177	BSW	E	C	68	4
	15	185/60R15	84/88	H XL	5.5	603	189	BSW	E	C	68	4
	15	195/60R15	88	H/V	6.0	615	201	BSW	E	C	69	4
	15	205/60R15	91	V	6.0	627	209	BSW	E	C	69	4
	15	215/60R15	94	H	6.5	638	218	BSW	E	C	70	4
	16	205/60R16	92/96	V/H XL	6.0	652	209	BSW	E	C	69	4
	16	215/60R16	95/88	H/V V XL	6.5	664	221	BSW	E	C	70	4
	16	225/60R16	98	H	6.5	676	228	BSW	E	C	70	4
	16	235/60R16	100	H	7.0	688	240	BSW	E	C	70	4
	65	13	155/65R13	73	T	5.0	540	157	BSW	E	C	68
13		165/65R13	77	T	5.0	544	170	BSW	E	C	68	4
14		155/65R14	75	H	4.5	557	154	BSW	E	C	68	4
14		165/65R14	79	H	5.0	570	170	BSW	E	C	68	4
14		175/65R14	82/86	T/H T XL	5.0	584	177	BSW	E	C	68	4
14		185/65R14	86	T/H	5.5	609	189	BSW	E	C	68	4
15		175/65R15	84	H	5.0	609	177	BSW	E	C	68	4
15		185/65R15	88/92	H XL	5.5	621	189	BSW	E	C	68	4
15		195/65R15	91/95	H/V H XL	6.0	635	201	BSW	E	C	69	4
15		205/65R15	94	H/V	6.0	647	209	BSW	E	C	69	4
15		215/65R15	96/100	H XL	6.5	661	221	BSW	E	C	70	4
16		215/65R16	98	H	6.5	686	221	BSW	E	C	70	4
70	13	155/70R13	75	T	4.5	548	157	BSW	E	C	68	4
	13	165/70R13	79	T	5.5	562	170	BSW	E	C	68	4
	13	175/70R13	82	T	5.5	576	177	BSW	E	C	68	4
	13	185/70R13	86	T	5.5	590	189	BSW	E	C	68	4
	14	165/70R14	81	T/H	5.0	588	170	BSW	E	C	68	4
	14	175/70R14	84/88	H/T XL	5.0	602	177	BSW	E	C	68	4
	14	185/70R14	88	H	5.5	616	189	BSW	E	C	68	4
	14	195/70R14	91	H	6.0	630	201	BSW	E	C	69	4
	14	205/70R14	95	H	6.0	644	209	BSW	E	C	69	4
	14	215/70R14	96	H	6.5	654	220	BSW	E	C	70	4
	15	205/70R15	96	H	6.0	669	209	BSW	E	C	69	4
	15	215/70R15	98	H	6.5	683	221	BSW	E	C	70	4
15	225/70R15	100	H	6.5	697	228	BSW	E	C	70	4	
80	13	155/80R13	79	T	4.5	578	157	BSW	E	C	68	4
	13	165/80R13	83	T	4.5	598	165	BSW	E	C	68	4



ROYAL PASSENGER



Pattern specifically designed for a comfortable ride with low noise level.

Large groove design for improved water dispersion capabilities and prevent from hydroplaning.

Royal Passenger provides a comfortable, confident driving for highway and everyday use.



ROYAL BLACK

Royal Black · Royal Enjoy

ROYAL PERFORMANCE



ROYAL PERFORMANCE



FEATURES:

Outside-Pattern with well-balanced rigidity makes pressure on contact patch spread equally, providing excellent dry surface handling.

Inside-Curved groove walls are designed to aid shoulder water-directing grooves in water evacuation, providing stability and safety on wet roads at high speeds.

Central part of pattern is designed to increase resistance to hydroplaning.

Brand new noise-reduction design-5 differently formed blocks are placed in optimized disorder fashion to reach lowest noise level.

New wide outer profile design, while turning, not only allows to spread car weight pressure on contact patch more evenly, but also expands contact patch surface, improving handling.



Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
30	20	245/30R20	97	W XL	8.5	657	247	BSW	E	C	72	🔊
	20	275/30R20	97	W XL	9.5	675	278	BSW	E	C	72	🔊
	18	215/35R18	84	W XL	7.5	607	218	BSW	E	C	71	🔊
35	18	255/35R18	97	W XL	9.0	635	260	BSW	E	C	72	🔊
	20	225/35R20	93	W XL	8.0	666	230	BSW	E	C	72	🔊
	20	245/35R20	95	W XL	8.5	680	248	BSW	E	C	72	🔊
	20	255/35R20	97	W XL	9.0	686	260	BSW	E	C	72	🔊
	20	275/35R20	102	W XL	9.5	701	278	BSW	E	C	72	🔊
40	17	205/40R17	84	W XL	7.5	596	212	BSW	E	C	70	🔊
	17	215/40R17	87	W XL	7.5	604	218	BSW	E	C	71	🔊
	18	215/40R18	89	W XL	7.5	629	218	BSW	E	C	71	🔊
	18	225/40R18	92	W XL	8.5	637	230	BSW	E	C	71	🔊
	18	235/40R18	95	W XL	8.5	645	241	BSW	E	C	71	🔊
	18	245/40R18	97	W XL	8.5	653	248	BSW	E	C	72	🔊
	18	255/40R18	99	W XL	9.0	661	263	BSW	E	C	72	🔊
45	20	275/40R20	106	V XL	9.5	728	278	BSW	E	C	72	🔊
	15	195/45R15	82	V XL	6.5	557	195	BSW	E	C	70	🔊
	16	195/45R16	84	V XL	6.5	582	195	BSW	E	C	70	🔊
	16	205/45R16	87	W XL	7.0	590	206	BSW	E	C	70	🔊
	17	205/45R17	88	W XL	7.0	616	206	BSW	E	C	70	🔊
	17	215/45R17	91	W XL	7.0	626	213	BSW	E	C	71	🔊
	17	225/45R17	94	W XL	7.5	634	225	BSW	E	C	71	🔊
	17	235/45R17	97	W XL	7.5	644	236	BSW	E	C	71	🔊
	17	245/45R17	99	W XL	8.0	652	243	BSW	E	C	72	🔊
	18	225/45R18	95	W XL	7.5	659	225	BSW	E	C	71	🔊
	18	235/45R18	98	W XL	8.0	667	240	BSW	E	C	71	🔊
	18	245/45R18	100	W XL	8.0	677	243	BSW	E	C	72	🔊
	20	245/45R20	103	W XL	8.0	728	243	BSW	E	C	72	🔊
20	255/45R20	105	W XL	8.5	738	255	BSW	E	C	72	🔊	
20	275/45R20	110	V XL	9.0	756	273	BSW	E	C	72	🔊	
50	15	195/50R15	82	V	6.0	577	201	BSW	E	C	70	🔊
	16	195/50R16	84/88	H/V V XL	6.0	602	201	BSW	E	C	70	🔊
	16	205/50R16	87/91	W XL	6.5	612	214	BSW	E	C	70	🔊
	16	225/50R16	92	W XL	7.0	626	222	BSW	E	C	70	🔊
	17	205/50R17	93	W XL	6.5	638	214	BSW	E	C	70	🔊
	17	215/50R17	95	W XL	7.5	648	226	BSW	E	C	71	🔊
	17	225/50R17	98	W XL	8.0	658	233	BSW	E	C	71	🔊
	17	235/50R17	100	W XL	7.5	668	245	BSW	E	C	71	🔊
	18	235/50R18	101	W XL	7.5	693	243	BSW	E	C	71	🔊
	18	245/50R18	104	W XL	7.5	704	252	BSW	E	C	72	🔊
	19	255/50R19	107	V XL	8.0	738	265	BSW	E	C	72	🔊
	20	265/50R20	111	V XL	9.0	774	277	BSW	E	C	72	🔊
	20	285/50R20	116	V XL	9.0	794	297	BSW	E	C	72	🔊
55	15	195/55R15	85	V	6.0	595	201	BSW	E	C	70	🔊
	16	185/55R16	87	V XL	6.0	610	194	BSW	E	C	70	🔊
	16	195/55R16	87/91	H/V V XL	6.0	619	190	BSW	E	C	70	🔊
	16	205/55R16	91/94	V W XL	6.5	632	214	BSW	E	C	70	🔊
	16	215/55R16	97	W XL	7.0	642	226	BSW	E	C	71	🔊
	16	225/55R16	99	W XL	7.0	680	233	BSW	E	C	71	🔊
	17	215/55R17	98	W XL	7.0	668	226	BSW	E	C	71	🔊
	17	225/55R17	101	W XL	7.0	680	233	BSW	E	C	71	🔊
	17	235/55R17	103	W XL	7.5	690	245	BSW	E	C	71	🔊
	18	255/55R18	109	V XL	8.0	737	265	BSW	E	C	72	🔊
	19	235/55R19	105	V XL	7.5	741	245	BSW	E	C	71	🔊
	19	245/55R19	107	V XL	7.5	753	253	BSW	E	C	71	🔊
	19	255/55R19	111	V XL	8.0	763	265	BSW	E	C	72	🔊
20	275/55R20	117	V XL	8.5	810	284	BSW	E	C	72	🔊	
60	17	225/60R17	99	V	6.5	702	228	BSW	E	C	72	🔊
	17	255/60R17	110	V XL	7.5	738	260	BSW	E	C	72	🔊
	18	235/60R18	107	V XL	7.0	739	240	BSW	E	C	72	🔊
	18	255/60R18	112	V XL	7.5	763	257	BSW	E	C	72	🔊
	20	275/60R20	119	V XL	8.0	838	279	BSW	E	C	72	🔊
65	17	235/65R17	108	V XL	7.0	738	240	BSW	E	C	72	🔊
	17	245/65R17	108	H XL	7.0	750	248	BSW	E	C	72	🔊
	17	255/65R17	110	H	7.5	764	260	BSW	E	C	72	🔊
17	265/65R17	112	H	8.0	776	272	BSW	E	C	72	🔊	



FEATURES:

Comfort and Quietness Optimized tread pattern groove design and pattern pitch length arrangement (inside the box) greatly reduce driving noise and improve driving comfort.



Operation and Control on Dry Grounds Unique central pattern ribs improve response speed of operation and control and stability of straight driving, and wide shoulder pattern blocks improve turning stability.

Operation and Control on wet Grounds Four wide longitudinal grooves effectively drain water and improve drainage performance on wet grounds.

ROYAL SPORT



Ride Comfort Quiet Water-drainage Handling



Viabile pattern patches reduce noise and provides a quiet and comforable ride.

Four wide grooves improve water evacuation and effectively reduce aquaplaning.

The center pattern rib ensures a superior lateral handling; the sipes on the rib provide comfortable ride.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
50	20	255/50R20	109	V XL	8.0	764	270	BSW	E	C	72	4
	20	265/50R20	111	V XL	8.5	774	277	BSW	E	C	72	4
	20	285/50R20	116	V XL	9.0	794	297	BSW	E	C	72	4
55	18	225/55R18	98	H	7.0	705	233	BSW	E	C	71	4
	18	235/55R18	104	H XL	7.5	715	245	BSW	E	C	71	4
	20	275/55R20	117	V XL	8.5	810	284	BSW	E	C	72	4
60	17	215/60R17	96	H	6.5	680	221	BSW	E	C	71	4
	17	225/60R17	99	H	6.5	702	228	BSW	E	C	71	4
	17	235/60R17	102	H	7.0	714	240	BSW	E	C	71	4
	18	225/60R18	100	H	6.5	727	228	BSW	E	C	71	4
	18	245/60R18	105	H	7.0	751	254	BSW	E	C	72	4
	18	255/60R18	112	H XL	7.5	767	260	BSW	E	C	72	4
	18	265/60R18	110	H	8.0	775	272	BSW	E	C	71	4
65	18	285/60R18	116	H	8.5	802	290	BSW	E	C	72	4
	16	225/65R16	109	H	7.5	737	262	BSW	E	C	71	4
	17	215/65R17	99	H	6.5	710	221	BSW	E	C	71	4
	17	225/65R17	102	H	6.5	724	228	BSW	E	C	71	4
	17	235/65R17	104	H	7.0	738	240	BSW	E	C	71	4
	17	245/65R17	111	H XL	7.0	750	248	BSW	E	C	71	4
	17	255/65R17	110	H	7.5	764	260	BSW	E	C	71	4
	17	265/65R17	112	H	8.0	776	272	BSW	E	C	71	4
	17	275/65R17	115	H	8.0	791	279	BSW	E	C	72	4
	18	285/65R18	116	H	8.5	802	292	BSW	E	C	72	4
18	235/65R18	110	H XL	7.0	761	244	BSW	E	C	72	4	
18	275/65R18	116	H	8.0	789	286	BSW	E	C	72	4	



ROYAL COMMERCIAL




Aggressive on-road tread design.
 Engineered to power through mud and snow.
 Deep grooves dispers water from contact area,
 which also
 improve handling and breaking on wet surfaces.
 Tough sidewall reinforcements enhance durability
 and tire life.



FEATURES:

Deepen and plump pattern design with a wear-resistant formula enable tires to have a very long mileage and service life;

Longitudinal pattern grooves with horizontal curve grooves produce more obvious drainage effects, so that it is safer when driving in a raining day.

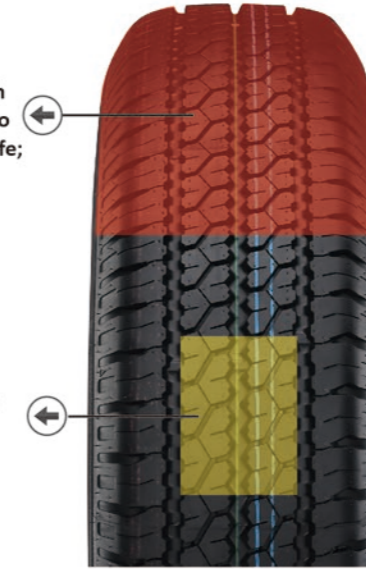

Enhanced sidewall support and bead design improve anti-load performance of tires and effectively avoid early damages;

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
65	14	175/65R14C	90/88	T	5.0	588	170	BSW	E	C	70	🔊
	15	215/65R15C	104/102	T	6.5	661	221	BSW	E	C	71	🔊
	16	195/65R16C	104/102	R	6.0	660	201	BSW	E	C	71	🔊
	16	205/65R16C	107/105	R	6.0	672	209	BSW	E	C	71	🔊
	16	215/65R16C	109/107	R	6.5	686	221	BSW	E	C	72	🔊
	16	225/65R16C	112/110	R	6.5	698	228	BSW	E	C	72	🔊
	16	235/65R16C	115/113	R	7.0	712	240	BSW	E	C	72	🔊
70	14	165/70R14C	89/87	T	5.0	584	177	BSW	E	C	70	🔊
	15	195/70R15C	104/102	R	6.0	655	201	BSW	E	C	71	🔊
	15	205/70R15C	106/104	R	6.0	669	209	BSW	E	C	71	🔊
	15	215/70R15C	109/107	R	6.5	683	221	BSW	E	C	72	🔊
	15	225/70R15C	112/110	R	6.5	697	228	BSW	E	C	72	🔊
75	16	175/75R16C	101/99	R	5.0	668	175	BSW	E	C	71	🔊
	16	185/75R16C	104/102	R	5.0	684	184	BSW	E	C	71	🔊
	16	195/75R16C	107/105	R	5.5	698	196	BSW	E	C	71	🔊
	16	205/75R16C	110/108	R	5.5	714	203	BSW	E	C	71	🔊
	16	215/75R16C	113/111	R	6.0	728	216	BSW	E	C	72	🔊
85	12	155R12C	88/86	R	4.5	550	157	BSW	E	C	71	🔊
	13	155R13C	90/88	R	4.5	578	157	BSW	E	C	71	🔊
	14	185R14C	102/100	R	5.5	650	188	BSW	E	C	71	🔊
	14	195R14C	106/104	R	5.5	666	198	BSW	E	C	71	🔊
	15	195R15C	106/104	R	5.5	693	198	BSW	E	C	71	🔊

ROYAL BLACK

Royal Black · Royal Enjoy

ROYAL VAN



ROYAL VAN



Ride Comfort Anti-chipping Long Mileage



↻ FEATURES:



→ New tread designed for longer life.

→ Improved tire especially design for commercial purposes, which also provides high mileage.

→ Deep grooves deliver excellent braking on wet surfaces.

← White side wall is popular for customers.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
75	14	205/75R14C	109/107	R	5.5	664	203	WSW				
	15	205/75R15C	109/107	R	5.5	689	203	WSW				
85	13	155R13C	85/83	R	4.5	578	157	WSW				
	13	155R13C	90/88	R	4.5	578	157	WSW				
	14	185R14C	102/100	R	5.5	650	188	WSW				
	14	195R14C	106/104	R	5.5	666	198	WSW				
	15	185R15C	103/102	R	5.5	674	188	WSW				
15	195R15C	106/104	R	5.5	693	198	WSW					



ROYAL PRIME



FEATURES:

Specifically designed for commercial purposes, which requires high mileage and life.

White side wall is popular for customers.



New tread design provides long tread life.

Deep grooves provide excellent braking on wet surfaces, superior water channeling ability and long read life.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
70	15	P205/70R15	95	S	6.0	669	209	WSW				
	15	P225/70R15	100	T	6.5	697	228	WSW				
	14	P195/75R14	92	S	5.0	648	196	WSW				
75	14	P205/75R14	95	S	5.5	664	203	WSW				
	15	P205/75R15	97	T	5.5	689	203	WSW				
	15	P215/75R15	100	T	6.0	703	216	WSW				
	15	P225/75R15	102	T	6.0	719	223	WSW				
	15	P235/75R15	105	S	6.5	733	235	WSW				

ROYAL BLACK

Royal Black · Royal Enjoy

ROYAL COMFORT



FEATURES:



Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.



Nice driving pleasure comes from strong tread and soft sidewall.



Perfect handing performance and good cornering performance.



Silica tread compound for low rolling resistance and good wet grip.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Max.Load kg	Max.Load lbs	Max.Pressure kpa	Max.Pressure psi
55	15	195/55R15	85	H/V	6.0	595	201	515	1135	300	44
	16	205/55R16	91	H/V	6.5	632	214	615	1356	300	44
	16	215/55R16	93	H	7.0	642	226	650	1433	300	44
60	14	185/60R14	82	H	5.5	578	189	475	1047	300	44
	15	195/60R15	88	H/V	6.0	615	201	560	1235	300	44
	16	215/60R16	95	H	6.5	664	221	690	1521	300	44
	16	225/60R16	98	H	6.5	676	228	750	1653	300	44
	16	235/60R16	100	H	7.0	688	240	800	1764	300	44

ROYAL COMFORT



ROYAL BLACK

Royal Black · Royal Enjoy



ROYAL A/T

FEATURES:



- ➔ Wide center pattern rib ensures excellent steering re-sponse on wet and dry road
- ➔ Wide pattern blocks on shoulder improve steering res-ponse
- ➔ Four main continuous longitudinal grooves ensure excellent drainage
- ➔ Narrow grooves improve the grip property, steering response, braking performance and traction wet, dry and snow condition
- ➔ Advanced pattern noise analysis software, optimizes the pattern block pitch arrangement and minimizes noise levels
- ➔ Wide tread blocks ensure enough contact area, and improve grip and envelop performance

ROYAL A/T



Ride Comfort Quiet Water-drainage Handling

➔ The new pattern blocks ensure the driving force on various road surfaces.

The grooves of big angle increase the three-dimensional appeal and guarantee water evacuation.

Special sippers design and stiff pattern blocks guarantee outstanding cornering and handling performance.

Newly developed compound improves wear, wet grip and other performance.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
65	17	P255/65R17	110	T	6.5	724	228	OWL	E	C	72	🔊
	17	P265/65R17	110	T	7.0	776	272	OWL	E	C	72	🔊
	17	P265/65R17	112	T	7.0	776	272	OWL	E	C	72	🔊
	17	P275/65R17	115	T	8.0	791	279	OWL	E	C	72	🔊
	16	P215/70R16	99	T	6.5	768	221	OWL	E	C	72	🔊
	16	P215/70R16	100	T	6.5	768	221	RBL	E	C	72	🔊
	16	P225/70R16	101	T	6.5	722	228	OWL	E	C	72	🔊
	16	P225/70R16	103	T	6.5	722	228	OWL	E	C	72	🔊
	16	P235/70R16	104	T	7.0	736	240	OWL	E	C	72	🔊
	16	P235/70R16	106	T	7.0	736	240	OWL	E	C	72	🔊
70	16	P245/70R16	106	T	7.0	750	248	OWL	E	C	72	🔊
	16	P245/70R16	107	T	7.0	750	248	OWL	E	C	72	🔊
	16	P245/70R16	111	SXL	7.0	750	248	OWL	E	C	72	🔊
	16	P255/70R16	109	T	7.5	764	260	OWL	E	C	72	🔊
	16	P255/70R16	111	T	7.5	764	260	OWL	E	C	72	🔊
	16	P265/70R16	111	T	8.0	778	272	OWL	E	C	72	🔊
	16	P265/70R16	112	T	8.0	778	272	OWL	E	C	72	🔊
	16	P275/70R16	114	T	8.0	792	279	OWL	E	C	72	🔊
	17	P265/70R17	113	T	8.0	804	272	OWL	E	C	72	🔊
	17	P265/70R17	115	T	8.0	804	272	OWL	E	C	72	🔊
17	LT265/70R17	112/118	S	8.0	804	272	OWL	E	C	72	🔊	
75	15	P235/75R15	109	SXL	6.5	733	235	OWL	E	C	72	🔊
	15	LT235/75R15	104/101	S	6.5	733	233	OWL	E	C	72	🔊
	15	245/75R15C	109/107	S	7.0	749	248	RBL	E	C	72	🔊
	16	LT225/75R16	115/112	S	6.0	744	223	OWL	E	C	72	🔊
	16	LT245/75R16	120/116	S	7.0	744	248	OWL	E	C	72	🔊
	16	LT265/75R16	123/120	S	7.5	804	267	OWL	E	C	72	🔊
	16	LT285/75R16	122/119	S	8.0	834	286	OWL	E	C	72	🔊
	16	185/75R16C	104/102	S	5.0	684	184	RBL	E	C	72	🔊
	17	LT245/75R17	121/118	S	7.0	800	248	OWL	E	C	72	🔊
	15	215R15C	112/110	S	6.0	724	218	RBL	E	C	72	🔊
15	LT31x10.50R15	107	S	8.5	775	268	OWL	E	C	72	🔊	
16	205R16C	110/108	S	5.5	738	200	OWL	E	C	72	🔊	
16	LT215/85R16	115/112	S	6.0	772	216	OWL	E	C	72	🔊	
16	LT235/85R16	120/116	S	6.0	806	235	RBL	E	C	72	🔊	

ROYAL BLACK

Royal Black · Royal Enjoy



ROYAL M/T

FEATURES:

Excellent Self-cleaning Ability Open shoulder pattern pieces ensure excellent self-cleaning ability and high traction of tires on gravel, muddy and other non-paved roads.

Technology of Preventing Stones from being Embedded


Stones are prevented from being embedded in the central and side grooves to avoid external damages to tires and achieve steady operation and control.

Rim Protection Design A special tire protection design is used to avoid damages to the rim.

Shoulder Friction Prevention Line Design The shoulder friction prevention line design improves scratch and punctures resistance and friction resistance performance of tires and improves the driving safety of the tires. With convex character design at sidewalls, such tires are striking, beautiful and fashionable.



Durability Three-layer carcass and strong steel wire belt structure enable tires to have higher skeleton intensity, and provide excellent operation and control performance and durability.



Excellent Off-road Performance Special rough pattern piece design enables tread pattern pieces to stretch into soil, gravel and wet grassland and play a strong grip in muddy and gravel roads and other harsh road conditions, so as to bring more outstanding off-road traction.

ROYAL M/T



Large aggressive shoulder lugs. Strong protection block on upper shoulder for exceptional bruise, impact, cut resistance and protection from other off-road hazards.

Uniquely designed incremental block edge improves clearance of dirt and sand of constant performance.

Uniquely designed radius of sub-grooves enhances off-road performance.

SRG(Sloped Radius Gradient) block design increase block stiffness, enhances performance, and delivers serious off-road traction.

Bar at bottom of groove clears mud and rock particles and provides ultimate off-road traction.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
70	17	LT265/70R17	121/118	Q	8.0	804	272	RBL				
	17	LT285/70R17	126/123	Q	8.5	831	284	RBL				
75	16	LT245/75R16	120/116	Q	7.0	771	248	RBL				
	16	LT265/75R16	123/120	Q	7.5	804	267	RBL				
	16	LT285/75R16	126/123	Q	8.0	834	286	RBL				
85	15	LT31*10.50R15	109	Q	8.5	775	268	RBL				
	15	LT33*12.50R15	108	Q	10.0	838	320	RBL				
	15	LT35*12.50R15	113	Q	10.0	890	326	RBL				
	16	LT235/85R16	120/116	Q	6.5	806	235	RBL				
	17	LT35*12.50R17	126/123	Q	10.0	890	326	RBL				



ROYAL SNOW



FEATURES:

Viable pattern reduce noise and provides a quiet and comfortable ride.

Three wide grooves improve water evacuation and effectively reduce aquaplaning.

The center pattern rib ensures a superior lateral handling; the sipes on the rib provide comfort ride.



Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL				
									RRC	Wet Grip	Noise Value(dB)	Noise Class	
55	15	185/55R15	86	H XL	6.0	585	194	BSW	E	C	69	🔊	
	16	205/55R16	91	H	6.5	632	214	BSW	E	C	69	🔊	
	16	205/55R16	94	H XL	6.5	632	214	BSW	E	C	69	🔊	
60	14	165/60R14	75	T	5.0	554	170	BSW	E	C	68	🔊	
	15	185/60R15	88	H XL	5.5	603	189	BSW	E	C	69	🔊	
	15	195/60R15	88	H	6.0	615	201	BSW	E	C	69	🔊	
	16	205/60R16	96	H XL	6.0	652	209	BSW	E	C	69	🔊	
	16	215/60R16	99	H XL	6.5	664	221	BSW	E	C	69	🔊	
	16	225/60R16	98	H	6.5	676	228	BSW	E	C	69	🔊	
	17	215/60R17	96	H	6.5	690	221	BSW	E	C	70	🔊	
	17	225/60R17	99	H	6.5	702	228	BSW	E	C	70	🔊	
	65	14	155/65R14	75	T	4.5	557	154	BSW	E	C	68	🔊
		14	165/65R14	79	T	5.0	570	170	BSW	E	C	68	🔊
14		175/65R14	82	T	5.0	584	177	BSW	E	C	68	🔊	
14		185/65R14	86	T	5.5	609	189	BSW	E	C	68	🔊	
15		175/65R15	84	H	5.0	609	177	BSW	E	C	69	🔊	
15		185/65R15	88	H	5.5	621	189	BSW	E	C	69	🔊	
15		205/65R15	94	H	6.0	647	209	BSW	E	C	69	🔊	
15		215/65R15C	104/102	R	6.5	661	221	BSW	E	C	69	🔊	
16		195/65R16C	104/102	R	6.0	660	201	BSW	E	C	69	🔊	
16		205/65R16C	107/105	R	6.0	672	209	BSW	E	C	69	🔊	
16		215/65R16C	109/107	R	6.5	686	221	BSW	E	C	69	🔊	
16		215/65R16	98	H	6.5	686	221	BSW	E	C	69	🔊	
16		225/65R16C	112/110	R	6.5	698	228	BSW	E	C	69	🔊	
16		225/65R16	100	H	6.5	698	228	BSW	E	C	69	🔊	
16		235/65R16C	115/113	R	7.0	712	240	BSW	E	C	69	🔊	
16		235/65R16	103	H	7.0	712	240	BSW	E	C	69	🔊	
17		215/65R17	99	H	6.5	710	221	BSW	E	C	70	🔊	
17	225/65R17	102	T	6.5	724	228	BSW	E	C	70	🔊		
17	235/65R17	108	T XL	7.0	738	240	BSW	E	C	70	🔊		
17	245/65R17	111	T XL	7.0	750	248	BSW	E	C	70	🔊		
17	265/65R17	112	T	8.0	776	272	BSW	E	C	70	🔊		
70	13	175/70R13	82	T	5.0	576	177	BSW	E	C	68	🔊	
	14	165/70R14	85	T XL	5.0	588	170	BSW	E	C	68	🔊	
	14	175/70R14	88	T XL	5.0	602	177	BSW	E	C	68	🔊	
	14	185/70R14	92	T XL	5.5	616	189	BSW	E	C	68	🔊	
	14	195/70R14	95	T XL	6.0	630	201	BSW	E	C	68	🔊	
	15	195/70R15C	104/102	R	6.0	655	201	BSW	E	C	69	🔊	
	15	215/70R15C	109/107	R	6.5	683	221	BSW	E	C	69	🔊	
	15	215/70R15	98	T	6.5	683	221	BSW	E	C	69	🔊	
	15	225/70R15C	112/110	R	6.5	697	228	BSW	E	C	69	🔊	
	16	215/70R16	100	T	6.5	708	217	BSW	E	C	69	🔊	
	16	225/70R16	107	T XL	6.5	722	228	BSW	E	C	69	🔊	
	16	235/70R16	106	T	7.0	736	240	BSW	E	C	69	🔊	
	16	245/70R16	111	T XL	7.0	750	248	BSW	E	C	69	🔊	
75	16	265/70R16	112	T	8.0	778	272	BSW	E	C	69	🔊	
	17	265/70R17	115	T	8.0	804	272	BSW	E	C	70	🔊	
	16	LT225/75R16C	115/112	S	6.0	744	223	BSW	E	C	69	🔊	
	16	LT245/75R16C	120/116	S	7.0	774	248	BSW	E	C	69	🔊	
	16	185/75R16C	104/102	R	5.0	684	184	BSW	E	C	69	🔊	
	16	195/75R16C	107/105	R	5.5	698	196	BSW	E	C	69	🔊	
	16	215/75R16C	113/111	R	6.0	728	216	BSW	E	C	69	🔊	



ROYAL WINTER



FEATURES:

Enhance ice surface performance-cellular rubber with silica compound and micro-pumps on tread blocks have function of absorbing water from ice surface,eliminating slippery factor and improving grip.

New innovation design of tread sipes-full 3D zigzag shaped sipes enhance rigidity of tread blocks and thus help to maximum contact patch and to minimize shape twist of grooves for better water/slush evacuation.

9 different tread block shapes are used to decrease noise.




Center rib design feature empty pitches, with long and narrow following wide and short-improving accelerating traction and reducing noise,and S-shaped sipe to enhance accelerating traction.

Wide circumferential and lateral grooves designed to evacuate water and slush efficiently!

Shoulder blocks feature W-shaped micro-grooves which increase responsiveness of tyre while cornering,also being an addition to decorative pattern of shoulder outer wall.

Series	Inch	Size	Load Index	Speed Rating	Rim Width (inch)	OD (mm)	SW (mm)	Sidewall Type	EU TIRE LABEL			
									RRC	Wet Grip	Noise Value(dB)	Noise Class
40	18	225/40R18	92	H XL	9.0	661	263	BSW	E	C	71	🔊
	20	275/40R20	106	H XL	9.5	728	278	BSW	E	C	72	🔊
45	17	225/45R17	94	H XL	7.5	634	225	BSW	E	C	70	🔊
	17	235/45R17	97	H XL	7.5	644	236	BSW	E	C	70	🔊
	18	245/45R18	100	H XL	8.0	677	243	BSW	E	C	71	🔊
	20	275/45R20	110	H XL	9.0	756	273	BSW	E	C	72	🔊
50	15	195/50R15	82	H	6.0	577	201	BSW	E	C	69	🔊
	17	205/50R17	93	H XL	6.5	638	214	BSW	E	C	70	🔊
	17	215/50R17	95	H XL	7.5	719	245	BSW	E	C	70	🔊
	17	225/50R17	98	H XL	8.0	739	265	BSW	E	C	70	🔊
	19	255/50R19	107	H XL	8.0	739	265	BSW	E	C	71	🔊
55	15	195/55R15	85	H	6.0	595	201	BSW	E	C	69	🔊
	16	195/55R16	91	H XL	6.0	619	190	BSW	E	C	69	🔊
	16	205/55R16	91	H	6.5	632	214	BSW	E	C	69	🔊
	16	205/55R16	94	H XL	6.5	632	214	BSW	E	C	69	🔊
	16	215/55R16	97	H XL	7.0	642	226	BSW	E	C	69	🔊
	16	225/55R16	99	H XL	7.0	680	233	BSW	E	C	69	🔊
	17	215/55R17	98	H XL	7.0	668	226	BSW	E	C	70	🔊
60	17	225/55R17	101	H XL	7.0	680	233	BSW	E	C	70	🔊
	17	235/55R17	103	H XL	7.5	690	245	BSW	E	C	70	🔊
	18	235/55R18	104	H XL	7.5	715	245	BSW	E	C	71	🔊
	18	255/55R18	109	H XL	8.0	737	265	BSW	E	C	71	🔊
	19	255/55R19	111	H XL	8.0	763	265	BSW	E	C	71	🔊
	14	185/60R14	82	T	5.5	578	189	BSW	E	C	69	🔊
65	15	195/60R15	88	H	6.0	615	201	BSW	E	C	69	🔊
	18	235/60R18	107	H XL	7.0	739	240	BSW	E	C	71	🔊
	18	245/60R18	105	H	7.0	751	254	BSW	E	C	71	🔊
70	15	195/65R15	91	T	6.0	635	201	BSW	E	C	69	🔊
	15	195/65R15	95	T XL	6.0	635	201	BSW	E	C	69	🔊
70	13	165/70R13	79	T	5.0	562	170	BSW	E	C	68	🔊

Technical Parameters »

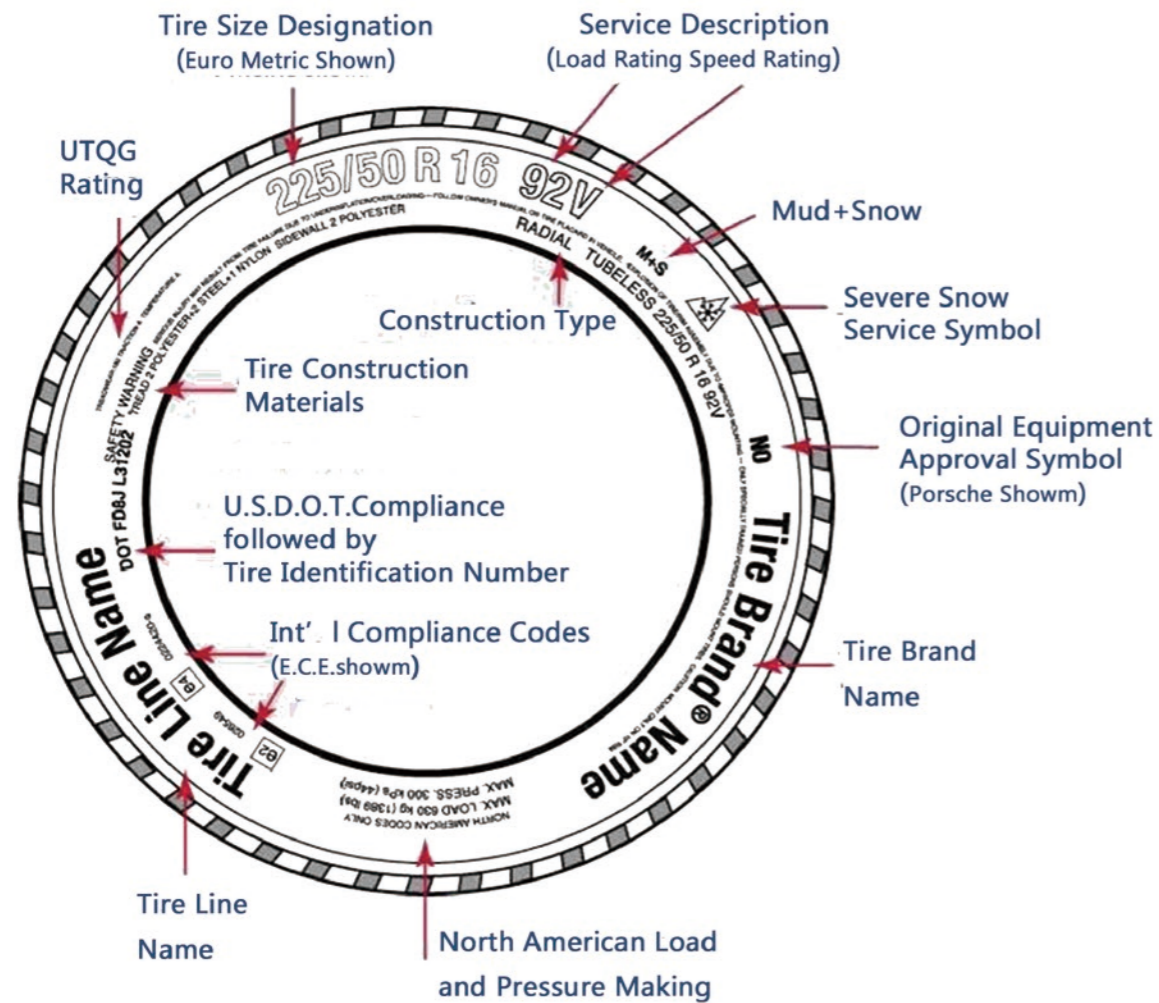

Our Manufacture: SHANDONG HAOHUA TIRE CO., LTD

Location: Houzhen Industry zone Shouguang ShanDong China

Area: 800,000 M Including 3 workshops, 4 warehouses and 3 office buildings

Total Capacity: 20 Million PCR & 2 Million TBR per year

Investments: 200 Million USD

Staffs: Around 4000 persons

Equipments: First class equipments are from Germany, Holland, Japan and China

Approved Quality standards: ISO/DOT/ECE/GCC/INMETRO/SONCAP

Main Values: GREEN, SAFETY AND ECONOMY

ROYAL BLACK ROYAL ENJOY

